


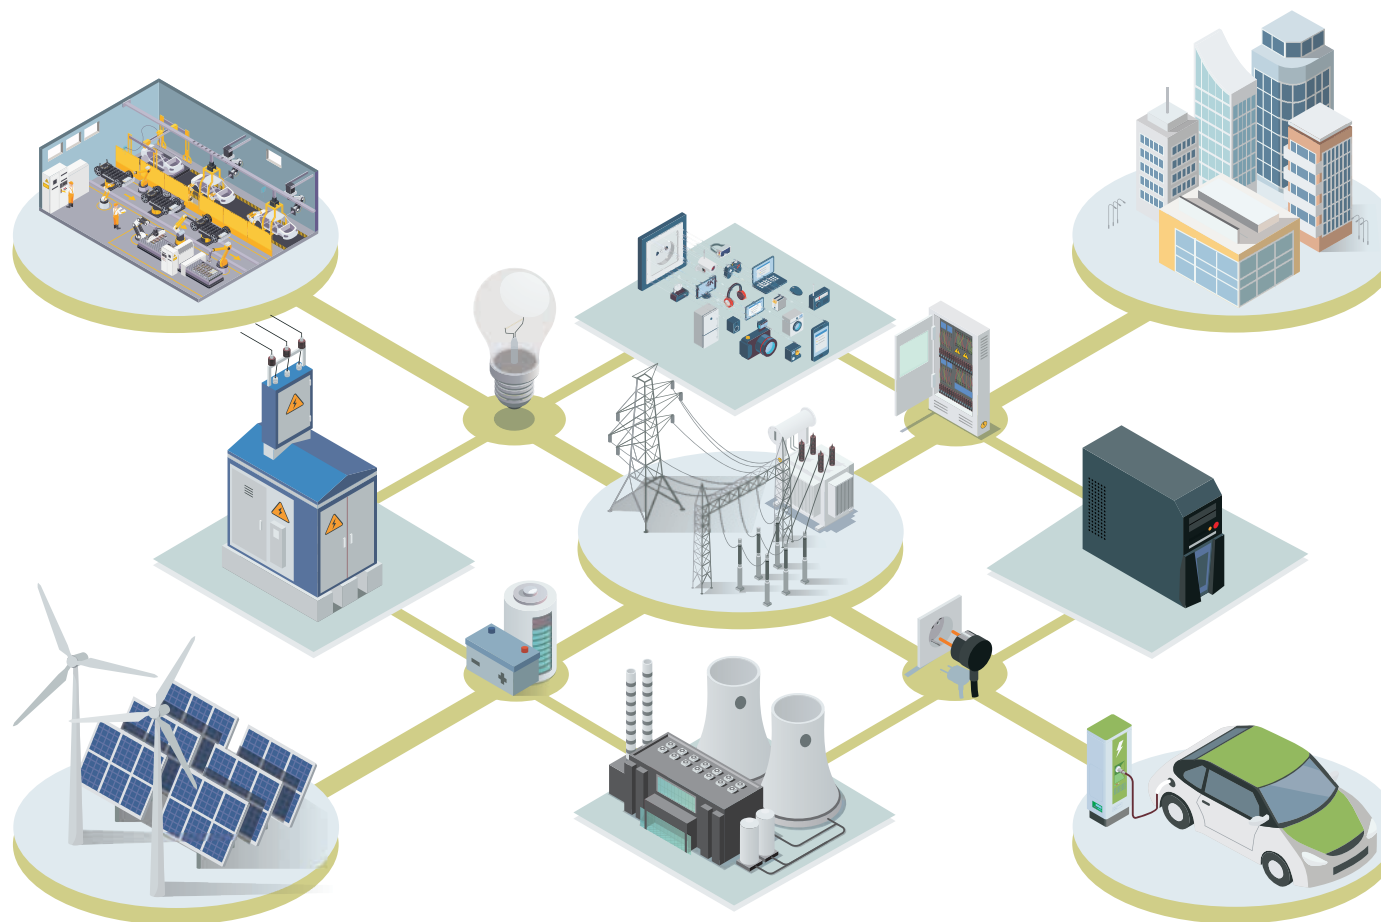

CONTENTS

1	Power Adapter	3
2	Open Frame Power Supply	5
3	Industrial Power Supply	6
4	CCTV Power Box	7
5	19' Rack Power Box	9
6	PoE Power Supply	10
7	Power Module	10
8	Din-Rail Power Supply	11

Company Profile

Shenzhen Hynapower Technology Co., Ltd. (Hynapower) was established in 2019 and is headquartered in Shenzhen. It is a high-tech enterprise focusing on **the research and development, manufacturing and sales of high-end power supply**. We are committed to providing **efficient, stable and environmentally friendly** power products to customers around the world, covering many fields such as communications, industrial automation, new energy, data centers, and intelligent security.

With **advanced technical strength, strict quality control and excellent customer service**, Hynapower Products are exported to **more than 80 countries and regions**, and have established long-term strategic cooperation with many internationally renowned enterprises.

Our core strengths

1.Full-scene power solution

We provide one-stop power products to meet the needs of different industries:

- ✓ **Communication power supply**—provides stable power protection for 5G base stations and data centers
- ✓ **Industrial power supply**—high reliability design, suitable for harsh industrial environments
- ✓ **Energy storage/UPS power supply**—supports new energy applications and ensures continuous power supply
- ✓ **LED drive power supply**—high efficiency and energy saving, suitable for intelligent lighting systems.
- ✓ **(GaN)Gallium Nitride fast charging**—lightweight, high efficiency, leading the next generation of power technology.
- ✓ **PoE power supply equipment**—simplify wiring and help Internet of Things(IoT) deployment.

2.International certification, quality assurance

The series of products have passed **UL、CE、CCC、CB、PSE、KC、SAA、FCC** and other global certifications, and comply with **RoHS and REACH** environmental protection standards. We strictly implement the **ISO9001(Quality Management)** and **ISO14001(Environmental Management)** systems to ensure that every aspect of our products from R&D to delivery meets the highest standards.

3.Intelligent manufacturing, efficient delivery

- ✓ **4000m²modern production base**, equipped with automatic SMT patch, DIP plug-in, assembly and packaging production line.
- ✓ **Advanced testing and aging laboratory**, 100% full inspection, to ensure high product reliability.
- ✓ **Flexible production**, support customized needs, and quickly respond to global.

Our Market

Hynapower Products are widely used in **communications, industry, new energy, consumer electronics, intelligent security** and other fields, and are exported to more than 80 countries and regions such as the **United States, Europe,Japan, South Korea, Southeast Asia, Australia, South America**, etc., trusted by customers around the world.

Corporate Philosophy

- ◆ **Mission:** To drive the global intelligent future with innovative power technology
- ◆ **Vision:** To become a world-class leader in high-end power solutions
- ◆ **Values:** Customer first· quality-oriented· innovation-driven · win-win cooperation



Controller



Router




IOT



Camera



Switch




Radiator



PC



Printer

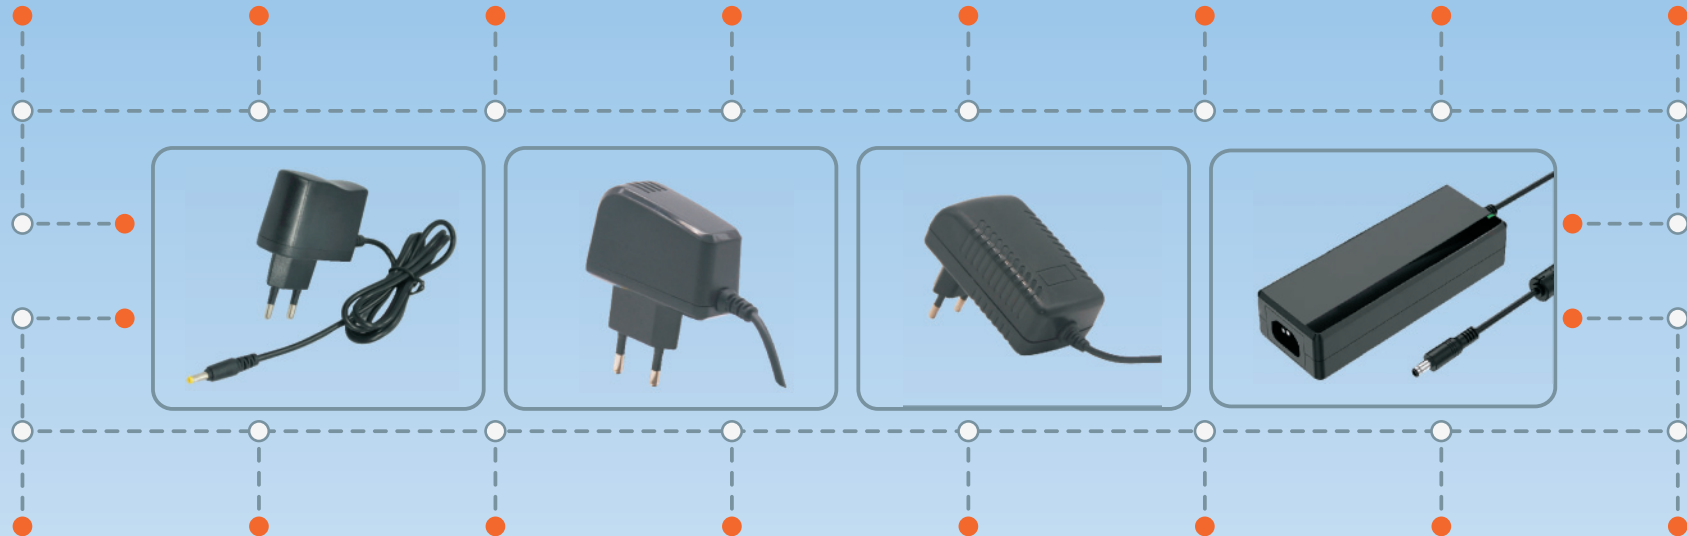


Coffee



Clock



Camera



Blinds



Music



Earphone



Indicator



Lighting



Power Adapter Series



HP-A06S Series



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/9V/12VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 64x58x25mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A06S-5	5V	1000mA	5W
HP-A06S-9	9V	666mA	6W
HP-A06S-12	12V	500mA	6W

HP-A12S Series



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/9V/12V/24VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 80 x 76 x 28mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A12S-5	5V	2000mA	10W
HP-A12S-9	9V	1333mA	12W
HP-A12S-12	12V	1000mA	12W
HP-A12S-24	24V	500mA	12W

HP-A12S-1 Series



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/9V/12V/24VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 75 x 50 x 27mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A12S-1-5	5V	2000mA	10W
HP-A12S-1-9	9V	1333mA	12W
HP-A12S-1-12	12V	1000mA	12W
HP-A12S-1-24	24V	500mA	12W

HP-A12S-2 Series



Rain Proof

- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/9V/12V/24VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 75 x 50 x 27mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A12S-2-5	5V	2000mA	10W
HP-A12S-2-9	9V	1333mA	12W
HP-A12S-2-12	12V	1000mA	12W
HP-A12S-2-24	24V	500mA	12W

HP-A24S Series



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/9V/12V/24VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 80x70x42mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A24S-5	5V	3000mA	15W
HP-A24S-9	9V	2500mA	22.5W
HP-A24S-12	12V	2000mA	24W
HP-A24S-24	24V	1000mA	24W

HP-A24S-1 Series



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/9V/12V/24VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 75x50x27mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A24S-1-5	5V	3000mA	15W
HP-A24S-1-9	9V	2500mA	22.5W
HP-A24S-1-12	12V	2000mA	24W
HP-A24S-1-24	24V	1000mA	24W

HP-A24S-2 Series



Rain Proof

- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/9V/12V/24VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 75x50x27mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A24S-2-5	5V	3000mA	15W
HP-A24S-2-9	9V	2500mA	22.5W
HP-A24S-2-12	12V	2000mA	24W
HP-A24S-2-24	24V	1000mA	24W

HP-A36C Series



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/9V/12V/24VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 90x45x55mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A36C-5	5V	7000mA	35W
HP-A36C-9	9V	4000mA	36W
HP-A36C-12	12V	3000mA	36W
HP-A36C-24	24V	1500mA	36W

Power Adapter Series



HP-A36S Series



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/9V/24V/48VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 119×52×34mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A36S-9	9V	3000mA	27W
HP-A36S-12	12V	3000mA	36W
HP-A36S-24	24V	1500mA	36W
HP-A36S-48	48V	750mA	36W

HP-A48S Series



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/12V/15V/24VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 100×52×34mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A48S-5	5V	5000mA	25W
HP-A48S-12	12V	4000mA	48W
HP-A48S-15	15V	3200mA	48W
HP-A48S-24	24V	2000mA	48W

HP-A65S Series



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24V/36V/52VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 119×52×34mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A65S-12	12V	5000mA	60W
HP-A65S-24	24V	2500mA	60W
HP-A65S-36	36V	1670mA	60W
HP-A65S-52	52V	1250mA	65W

HP-A96S Series



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24V/36V/52VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 131×57×33mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A96S-12	12V	6000mA	72W
HP-A96S-24	24V	4000mA	96W
HP-A96S-36	36V	2666mA	96W
HP-A96S-52	52V	1846mA	96W

HP-A135S Series



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24V/36V/52VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 170×70×41mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A135S-12	12V	8000mA	96W
HP-A135S-24	24V	5000mA	120W
HP-A135S-36	36V	3333mA	120W
HP-A135S-52	52V	2600mA	135W

HP-A180S Series



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24V/36V/52VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 170×70×41mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A180S-12	12V	13000mA	156W
HP-A180S-24	24V	7500mA	180W
HP-A180S-36	36V	5000mA	180W
HP-A180S-48	48V	3750mA	180W

HP-A240S Series



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24V/36V/52VDC (Optional)
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 190×86×41mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A240S-12	12V	18000mA	216W
HP-A240S-24	24V	10000mA	240W
HP-A240S-36	36V	6700mA	240W
HP-A240S-48	48V	5000mA	240W

HP-A1205-4/HP-A2425-4/HP-4812-4



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24V/48VDC (Optional)
- Output channels: 4 Channels
- Single output current: 1.25A
- Working Temperature: -10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature, Short-circuit protection
- Size: 119×52×34mm (Excluding cable Length)


Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-A1205-4	12V	5000mA	60W
HP-A2425-4	24V	2500mA	60W
HP-A4812-4	48V	1250mA	60W

Open Frame Power Supply Series



HP-P20S



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/12V/24V/48V/56VDC (Optional)
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 102×50×23mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-P20S-5	5V	4000mA	20W
HP-P20S-12	12V	2000mA	24W
HP-P20S-24	24V	1000mA	24W
HP-P20S-48	48V	500mA	24W
HP-P20S-56	56V	400mA	24W

HP-P30S



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/12V/24V/48V/56VDC (Optional)
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 100×50×25mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-P30S-5	5V	6000mA	30W
HP-P30S-12	12V	2500mA	30W
HP-P30S-24	24V	1250mA	30W
HP-P30S-48	48V	600mA	30W
HP-P30S-56	56V	530mA	30W

HP-P65S



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/12V/24V/48V/56VDC (Optional)
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 120×57×25mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-P65S-5	5V	13000mA	65W
HP-P65S-12	12V	5400mA	65W
HP-P65S-24	24V	2700mA	65W
HP-P65S-48	48V	1350mA	65W
HP-P65S-56	56V	1100mA	65W

HP-P240S




- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24VDC (Optional)
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 176×98×37mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-P240S-12	12V	20000mA	240W
HP-P240S-24	24V	10000mA	240W

HP-P150PDS




- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/52VDC
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 165×80×35mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-P150PDS	52V	2500mA	130W
	5V	4000mA	20W

HP-P330PDS




- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/52VDC
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 165×107×35mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-P330PDS	52V	5200mA	270W
	12V	5000mA	60W

HP-P450PDS




- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 5V/52VDC
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 165×107×35mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-P450PDS	52V	7500mA	390W
	12V	5000mA	60W

HP-P900PDS



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12.5V/54.5VDC
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 165×117×35mm (Excluding cable Length)

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-P900PDS	54.5V	14670mA	800W
	12.5V	8000mA	100W

Industrial Power Supply Series



HP-T1202 / HP-T2401 / HP-T4805



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24V/48VDC (Optional)
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 115×49×25mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-T1202	12V	2000mA	24W
HP-T2401	24V	1000mA	24W
HP-T4805	48V	500mA	24W

HP-T1203 / HP-T2415 / HP-T4807




- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24V/48VDC (Optional)
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 110×78×35mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated power
HP-T1203	12V	3000mA	36W
HP-T2415	24V	1500mA	36W
HP-T4807	48V	750mA	36W

HP-T1205 / HP-T2425 / HP-T4812



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24V/48VDC (Optional)
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 147×79×38mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-T1205	12V	5000mA	60W
HP-T2425	24V	2500mA	60W
HP-T4812	48V	1250mA	60W

HP-T1210 / HP-T2405 / HP-T4825



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24V/48VDC (Optional)
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 147×79×38mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-T1210	12V	10000mA	120W
HP-T2405	24V	5000mA	120W
HP-T4825	48V	2500mA	120W

HP-T1215 / HP-T2407 / HP-T4837



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- AC Input High and Low Voltage Switch Switching
- Output Voltage: 12V/24V/48VDC (Optional)
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 215×115×50mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-T1215	12V	15000mA	180W
HP-T2407	24V	7500mA	180W
HP-T4837	48V	3750mA	180W

HP-T1220 / HP-T2410 / HP-T4805



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- AC Input High and Low Voltage Switch Switching
- Output Voltage: 12V/24VDC (Optional)
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 215×115×50mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-T1220	12V	20000mA	240W
HP-T2410	24V	10000mA	240W
HP-T4805	48V	5000mA	240W

HP-T1225 / HP-T2412 / HP-T4806



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- AC Input High and Low Voltage Switch Switching
- Output Voltage: 12V/24V/48VDC (Optional)
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 215×115×30mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-T1225	12V	25000mA	300W
HP-T2412	24V	12500mA	300W
HP-T4806	48V	6250mA	300W

HP-T1230 / HP-T2415 / HP-T4807



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- AC Input High and Low Voltage Switch Switching
- Output Voltage: 12V/24V/48VDC (Optional)
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 215×115×30mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-T1230	12V	30000mA	360W
HP-T2415	24V	15000mA	360W
HP-T4807	48V	7500mA	360W

AC Power Box / UPS Power Box

Access Power Box Series



HP-AC2405-9



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: AC24V
- Output Channels: 4 Channels
- Single Output Current: 0.5A
- Independent fuse per channel
- Working Temperature: -10~40°C
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-AC2405-9	24V	5000mA	120W

HP-AC2410-9



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: AC24V
- Output Channels: 9 Channels
- Single Output Current: 1.1A
- Independent fuse per channel
- Working Temperature: -10~40°C
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-AC2410-9	24V	10000mA	240W

HP-AC1210-18 / HP-AC2410-18



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24VAC (Optional)
- Output Channels: 18 Channels
- Single Output Current: 0.5A
- Independent fuse per channel
- Working Temperature: -10~40°C
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-AC1210-18	12V	10000mA	120W
HP-AC2410-18	24V	10000mA	240W

HP-AC1220-18 / HP-AC2420-18



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24VAC (Optional)
- Output Channels: 18 Channels
- Single Output Current: 1.1A
- Independent fuse per channel
- Working Temperature: -10~40°C
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-AC1220-18	12V	20000mA	240W
HP-AC2420-18	24V	20000mA	480W

HP-AC2425-18



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 24VAC
- Output Channels: 18 Channels
- Single Output Current: 1.38A
- Independent fuse per channel
- Working Temperature: -10~40°C
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-AC2425-18	24V	25000mA	600W

HP-1203-UPS / HP-2415-UPS

UPS Power Box



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24VDC (Optional)
- Supports Built-In Access to Backup Lead-Acid Batteries
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-1203-UPS	12V	3000mA	36W
HP-2415-UPS	24V	1500mA	36W

HP-1205-UPS / HP-2425-UPS

UPS Power Box



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24VDC (Optional)
- Supports Built-In Access to Backup Lead-Acid Batteries
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-1205-UPS	12V	5000mA	60W
HP-2425-UPS	24V	2500mA	60W

HP-2DC2U500

Access Control Power Box



Access Control

- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24VDC
- Output Channels: 12VDC*8 Channels, 24VDC*9 Channels
- Single Output Current: 1.25A*8CH / 1.6A*9CH
- Supports Built-In Access to Backup Lead-Acid Batteries
- Independent fuse per channel
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Working Temperature: -10~40°C
- Size: 480 x 350 x 95mm


Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-2DC2U500	12V*8CH	10000mA	120W
	24V*9CH	14500mA	350W

DC Power Supply Box Series



HP-DC1203-04 / HP-DC2415-04




- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 4 Channels
- Single Output Current: 0.75A*12V / 0.38A*24V
- Independent fuse per channel
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-DC1203-04	12V	3000mA	36W
HP-DC2415-04	24V	1500mA	36W

HP-DC1205-04 / HP-DC2425-04



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 4 Channels
- Single Output Current: 1.25A*12V / 0.6A*24V
- Independent fuse per channel
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-DC1205-04	12V	5000mA	60W
HP-DC2425-04	24V	2500mA	60W

HP-DC1210-09 / HP-DC2405-09



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 9Channels
- Single Output Current: 1.1A*12V / 0.5A*24V
- Independent fuse per channel
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 240 x 220 x 60mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-DC1210-09	12V	10000mA	120W
HP-DC2405-09	24V	5000mA	120W

HP-DC1210-18 / HP-DC2405-18



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 18Channels
- Single Output Current: 0.5A*12V / 0.3A*24V
- Independent fuse per channel
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-DC1210-18	12V	10000mA	120W
HP-DC2405-18	24V	5000mA	120W

HP-DC1215-18 / HP-DC2407-18



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- AC Input High and Low Voltage Switch Switching
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 18 Channels
- Single Output Current: 0.8A*12V / 0.4A*24V
- Independent fuse per channel
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-DC1215-18	12V	15000mA	180W
HP-DC2407-18	24V	7500mA	180W

HP-DC1220-18 / HP-DC2410-18



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- AC Input High and Low Voltage Switch Switching
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 18 Channels
- Single Output Current: 1.1A*12V / 0.5A*24V
- Independent fuse per channel
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-DC1220-18	12V	20000mA	240W
HP-DC2410-18	24V	10000mA	240W

HP-DC1225-18 / HP-DC2412-18



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- AC Input High and Low Voltage Switch Switching
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 18 Channels
- Single Output Current: 1.38A*12V / 0.7A*24V
- Independent fuse per channel
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-T1225	12V	25000mA	300W
HP-T2412	24V	12500mA	300W

HP-DC1230-18 / HP-DC2415-18



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- AC Input High and Low Voltage Switch Switching
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 18 Channels
- Single Output Current: 1.6A*12V / 0.8A*24V
- Independent fuse per channel
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 300 x 220 x 80mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-DC1230-18	12V	29000mA	350W
HP-DC2415-18	24V	14600mA	350W

19'' Rack Power Box Series



HP-1U1210-9-UPS / HP-1U2405-9-UPS



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- 110V/220V AC input Switch Function
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 9 Channels
- Single Output Current: 1.1A*12V / 0.5A*24V
- Independent fuse per channel
- Supports UPS Charging Function
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 440 x 220 x 44mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-1U1210-9-UPS	12V	10000mA	120W
HP-1U2405-9-UPS	24V	5000mA	120W

HP-1U1210-9 / HP-1U2405-9



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- 110V/220V AC input Switch Function
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 9 Channels
- Single Output Current: 1.1A*12V / 0.5A*24V
- Independent fuse per channel
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 440 x 220 x 44mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-1U1210-9	12V	10000mA	120W
HP-1U2405-9	24V	5000mA	120W

HP-1U1220-18-UPS / HP-1U2410-18-UPS



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- 110V/220V AC input Switch Function
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 18 Channels
- Single Output Current: 1.1A*12V / 0.5A*24V
- Independent fuse per channel
- Supports UPS Charging Function
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 440 x 220 x 44mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-1U1220-18-UPS	12V	20000mA	240W
HP-1U2410-18-UPS	24V	10000mA	240W

HP-1U1220-18 / HP-1U2410-18



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- 110V/220V AC input Switch Function
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 18 Channels
- Single Output Current: 1.1A*12V / 0.5A*24V
- Independent fuse per channel
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 440 x 220 x 44mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-1U1210-18	12V	20000mA	240W
HP-1U2410-18	24V	10000mA	240W

HP-1U1230-18-UPS / HP-1U2414-18-UPS



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- 110V/220V AC input Switch Function
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 18 Channels
- Single Output Current: 1.6A*12V / 0.8A*24V
- Independent fuse per channel
- Supports UPS Charging Function
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 440 x 220 x 44mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-1U1230-18-UPS	12V	29000mA	350W
HP-1U2414-18-UPS	24V	14500mA	350W

HP-1U1230-18 / HP-1U2414-18



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- 110V/220V AC input Switch Function
- Output Voltage: 12V/24VDC (Optional)
- Output Channels: 18 Channels
- Single Output Current: 1.6A*12V / 0.8A*24V
- Independent fuse per channel
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 440 x 220 x 44mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-1U1230-18	12V	29000mA	350W
HP-1U2414-18	24V	14500mA	350W

PoE Power / Power Module Series



HP-PE30

PoE Injector



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: DC52V
- Conforms to Standard: IEEE802.3af / IEEE802.3at
- Working Temperature:-10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 146 x 62 x 40mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-PE30	52V	580mA	30W

HP-PN911

PoE Power Supply



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: DC48V
- Working Temperature:-10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 146 x 62 x 40mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-PN911	48V	625mA	30W

HP-15S

Plug-In PoE Power Supply



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: DC48V
- Conforms to Standard: IEEE802.3af
- Working Temperature:-10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 84 x 70 x 42mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-15S	48V	325mA	15.6W

HP2412A AC to DC

AC-DC Power Module



- Input Voltage: 24VAC
- Output Voltage: DC12V
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 80 x 32 x 22mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP2412A AC to DC	12V	1000mA	12W

HP-30S

Plug-In PoE Power Supply



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage: DC48V
- Conforms to Standard: IEEE802.3af/IEEE802.3at
- Working Temperature:-10~40°C
- AC Plug Type: EU, AU, US, CN, UK, JP, Optional
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 84 x 70 x 42mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-30S	52V	580mA	30W

HP2412 DC to DC

DC-DC Power Module



- Input Voltage: 8-24VAC
- Output Voltage: DC12V
- Working Temperature:-10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 80 x 32 x 22mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP2412 DC to DC	12V	1000mA	12W

Din-Rail Power Supply Series



HP-IDP30-DC



- Input Voltage : 18~32VDC
- Input Frequency : 47~63Hz
- Output Voltage : DC20V
- Working Temperature: 0~60°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 83 x 53 x 42mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-IDP30-DC	20V	1.5A	30W

HP-IDP96



- Input Voltage : 100~240VAC (Range: 90~264VAC)
- Input Frequency : 50/60Hz (Range: 47~63Hz)
- Output Voltage : 12V/24V/48VDC (Optional)
- Working Temperature: -40~75°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 128.5 x 115 x 40.5mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-IDP96-12	12V	8A	96W
HP-IDP96-24	24V	4A	96W
HP-IDP96-48	48V	2A	96W

HP-IDP120




- Input Voltage : 100~240VAC (Range: 90~264VAC)
- Input Frequency : 50/60Hz (Range: 47~63Hz)
- Output Voltage : 12V/24V/48VDC (Optional)
- Working Temperature: -40~75°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 128.5 x 115 x 40.5mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-IDP120-12	12V	10A	120W
HP-IDP120-24	24V	5A	120W
HP-IDP120-48	48V	2.5A	120W

HP-IDP240



- Input Voltage : 100~240VAC (Range: 90~264VAC)
- Input Frequency : 50/60Hz (Range: 47~63Hz)
- Output Voltage : 24V/48VDC (Optional)
- Working Temperature: -40~75°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 140 x 138 x 60mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-IDP240-24	24V	10A	240W
HP-IDP240-48	48V	5A	240W

HP-IDP270-UPS



- Input Voltage: 100~240VAC (Range: 90~264VAC)
- Input Frequency: 50/60Hz (Range: 47~63Hz)
- Output Voltage : AC Mode 47~58VDC (Maximum) / Battery Mode 41~55VDC (Maximum)
- Support UPS Charging Function
- Working Temperature: -40~75°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 140 x 138 x 60mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-IDP270-UPS	AC pattern 48V	4A	220W
	Battery mode 55V	4A	220W
	charging current	0.8A	50W

HP-IDP480



- Input Voltage : 100~240VAC (Range: 90~264VAC)
- Input Frequency : 50/60Hz (Range: 47~63Hz)
- Output Voltage : 24V/48VDC (Optional)
- Working Temperature: -40~75°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 147 x 143 x 87.5mm

Output Current and Voltage Range:

Model	Output Voltage	Rated Current	Rated Power
HP-IDP480-24	24V	20A	480W
HP-IDP480-48	48V	10A	480W

HP-DC-ITX80



- Input Voltage: DC12V
- Output Voltage : +3.3V / +5V / +5VSB / +12V / -12V DC
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 157 x 45 x 30mm

Output Current and Voltage Range:

Model	HP-DC-ITX80				
Output	V1	V2	V3	V4	V5
Output voltage	+3.3V	+5V	+5VSB	+12V	-12V
Output current	5A	8A	2A	5A	0.15A
Output power	16.5W	40W	10W	60W	1.8W

HP-DC-ITX120



- Input Voltage: DC12V
- Output Voltage : +3.3V / +5V / +5VSB / +12V / -12V DC
- Working Temperature: -10~40°C
- Over-current, Over-voltage, Over-temperature & Short-circuit Protection
- Size: 157 x 45 x 30mm

Output Current and Voltage Range:

Model	HP-DC-ITX120				
Output	V1	V2	V3	V4	V5
Output voltage	+3.3V	+5V	+5VSB	+12V	-12V
Output current	8A	10A	2A	5A	0.15A
Output power	26.4W	50W	10W	60W	1.8W

Certifications



Production Equipments



High Speed SMT



High Speed SMT



High Precision Automatic
Printing Machine



Automatic
Loading Machine



Lead Free Reflow Soldering



Lead Free Wave Soldering Machine



First Article Tester

Test Equipments



Mos Tester



Transformer Tester



Insulation Tester




Pressure Resistance Tester



Surge Generator




High-Speed Communication
Line Coupling/Detuning Network



Ground Resistance Tester



Vibration Tester

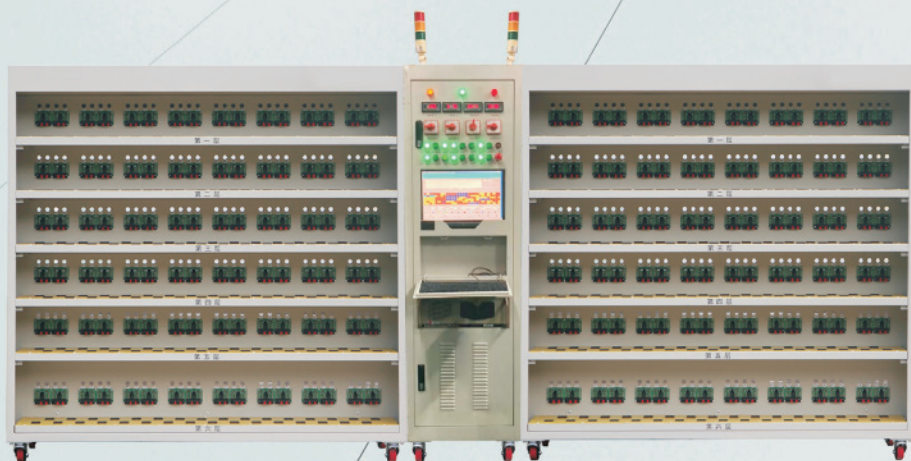

Aging Equipment



High and Low
Temperature Equipment



Salt Mist Tester



Shenzhen Hynapower Technology Co., Ltd

Address: 201A, Block B, Zhonggang Building, Fuhai Town, Baoan District, Shenzhen, P.R.China

TEL: 0755-23706700

Email: sales@hynapower.com

FAX: 0755-27330546

Web: www.hynapower.com